

# Tek-Mate


Issue: 03/12

## Portable Low Cost Leak Detector

A portable low cost hand detector of CFCs, HCFCs and HFCs with an automatic background contamination compensator. The TEK-Mate is efficient and reliable in finding leaks even in harsh and damp conditions.

The TEK-Mate uses a high / low sensitivity switch, variable intensity audible alarm and a variable frequency flashing LED to assist the user in pin pointing leaks.

The lightweight, simple operation and long lasting performance on two D-size batteries have helped make the TEK-Mate a favourite amongst portable detectors.

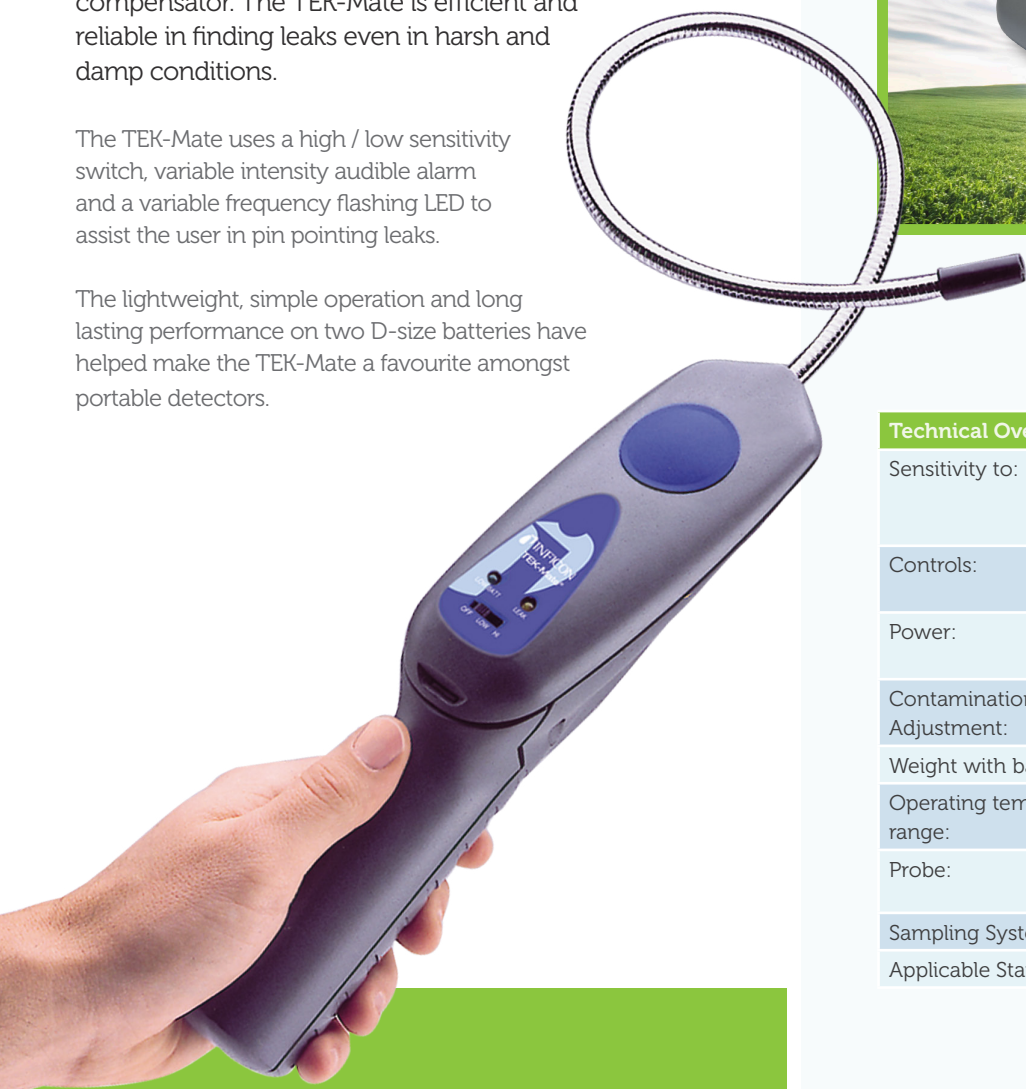

### Technical Overview

Sensitivity to:	HCFC's & HFC's R410A and R134A - 7 Grams / Annum
Controls:	3-position slide switch (off, low sensitivity & high sensitivity).
Power:	2 D-size (1.5 volt) alkaline batteries.
Contamination Adjustment:	Automatic.
Weight with batteries:	700 grams.
Operating temperature range:	-27°C to +50°C.
Probe:	Chrome-plated flexible metal. Approximate length 43cm.
Sampling System:	Positive displacement pump.
Applicable Standards:	CE, EN14624.

### TEK-Mate / Accessories

TEK-Mate	705-202-G1
Sensor	703-020-G1
Filter Kit	705-600-G1
TEK-Check (Calibrated Test Leak)	703-080-G1

\* Specification subject to alteration.

### Features at a glance

- » Patented heated diode sensor technology
- » Positive displacement pump
- » Variable intensity audible alarm
- » Sensitive to all HCFC & HFC refrigerants
- » High/Low sensitivity switch
- » Supplied in heavy duty case
- » Lightweight & cost effective